


- 20" Ischia Luminaire
- Custom Railroad Scroll Arm
- Stepped Steel Pole
- Large Domus Cover
- Banner Arms

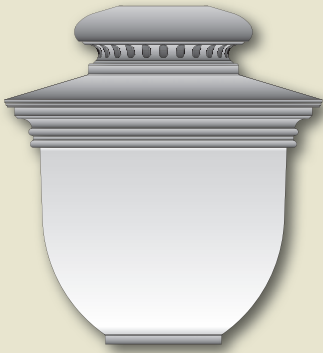

**ISC20**

Width: 18"  
 Height: 20"  
 Weight: 35lbs  
 EPA: 1.6ft<sup>2</sup>

## Ischia ordering guide



## ordering logic

### model

ISC20 20" Ischia

### lens material

- A acrylic
- P polycarbonate

### lens finish

- C clear
- F frosted
- W white

### source

- LED 60 & 90W
- QL 55 & 85W QL induction
- PSMH 50 - 150W
- HPS 50 - 150W
- CF 13 - 42W
- INC 150W

### optics

- DIR3 direct type III (LED)
- DIR5 direct type V (LED)
- SR3 segmented reflector type III
- SR5 segmented reflector type V
- BL bare lamp

### electrical options

- FS fusing
- PEC photocell
- QRS quartz restrike
- LSP lightning surge protector

### mounting options

- PM pendant

### model (cont)

ISC20 20" Ischia

### color (see page 33 for additional information)

- BB black
- BZ bronze
- BG green
- BW white
- BY gray
- RAL RAL \_\_\_\_\_
- OTHER \_\_\_\_\_

### footnotes:

1. Medium socket is standard for all HID sources under 250W.
2. DIR optics require LED source, LED source requires DIR optics.
3. LED and CF sources utilize a 120-277 voltage-sensing electronic driver, HID sources utilize a Quad-Tap (120, 208, 240 & 277V) core & coil magnetic ballast, consult factory for 347 or 480V. 12VDC LED drivers are available for solar power assembly integration, consult factory.
4. QL induction source shall be supplied at 4000K (CCT), specify if 3000K is required.
5. LED source shall be supplied at 4500K (CCT), specify if other color temp. is required (minimum quantities may apply).