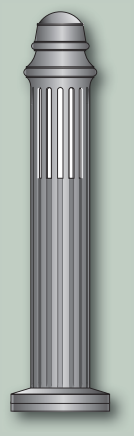

KEN42

Width: 9.5"

Height: 42"

Kensington
ordering guide

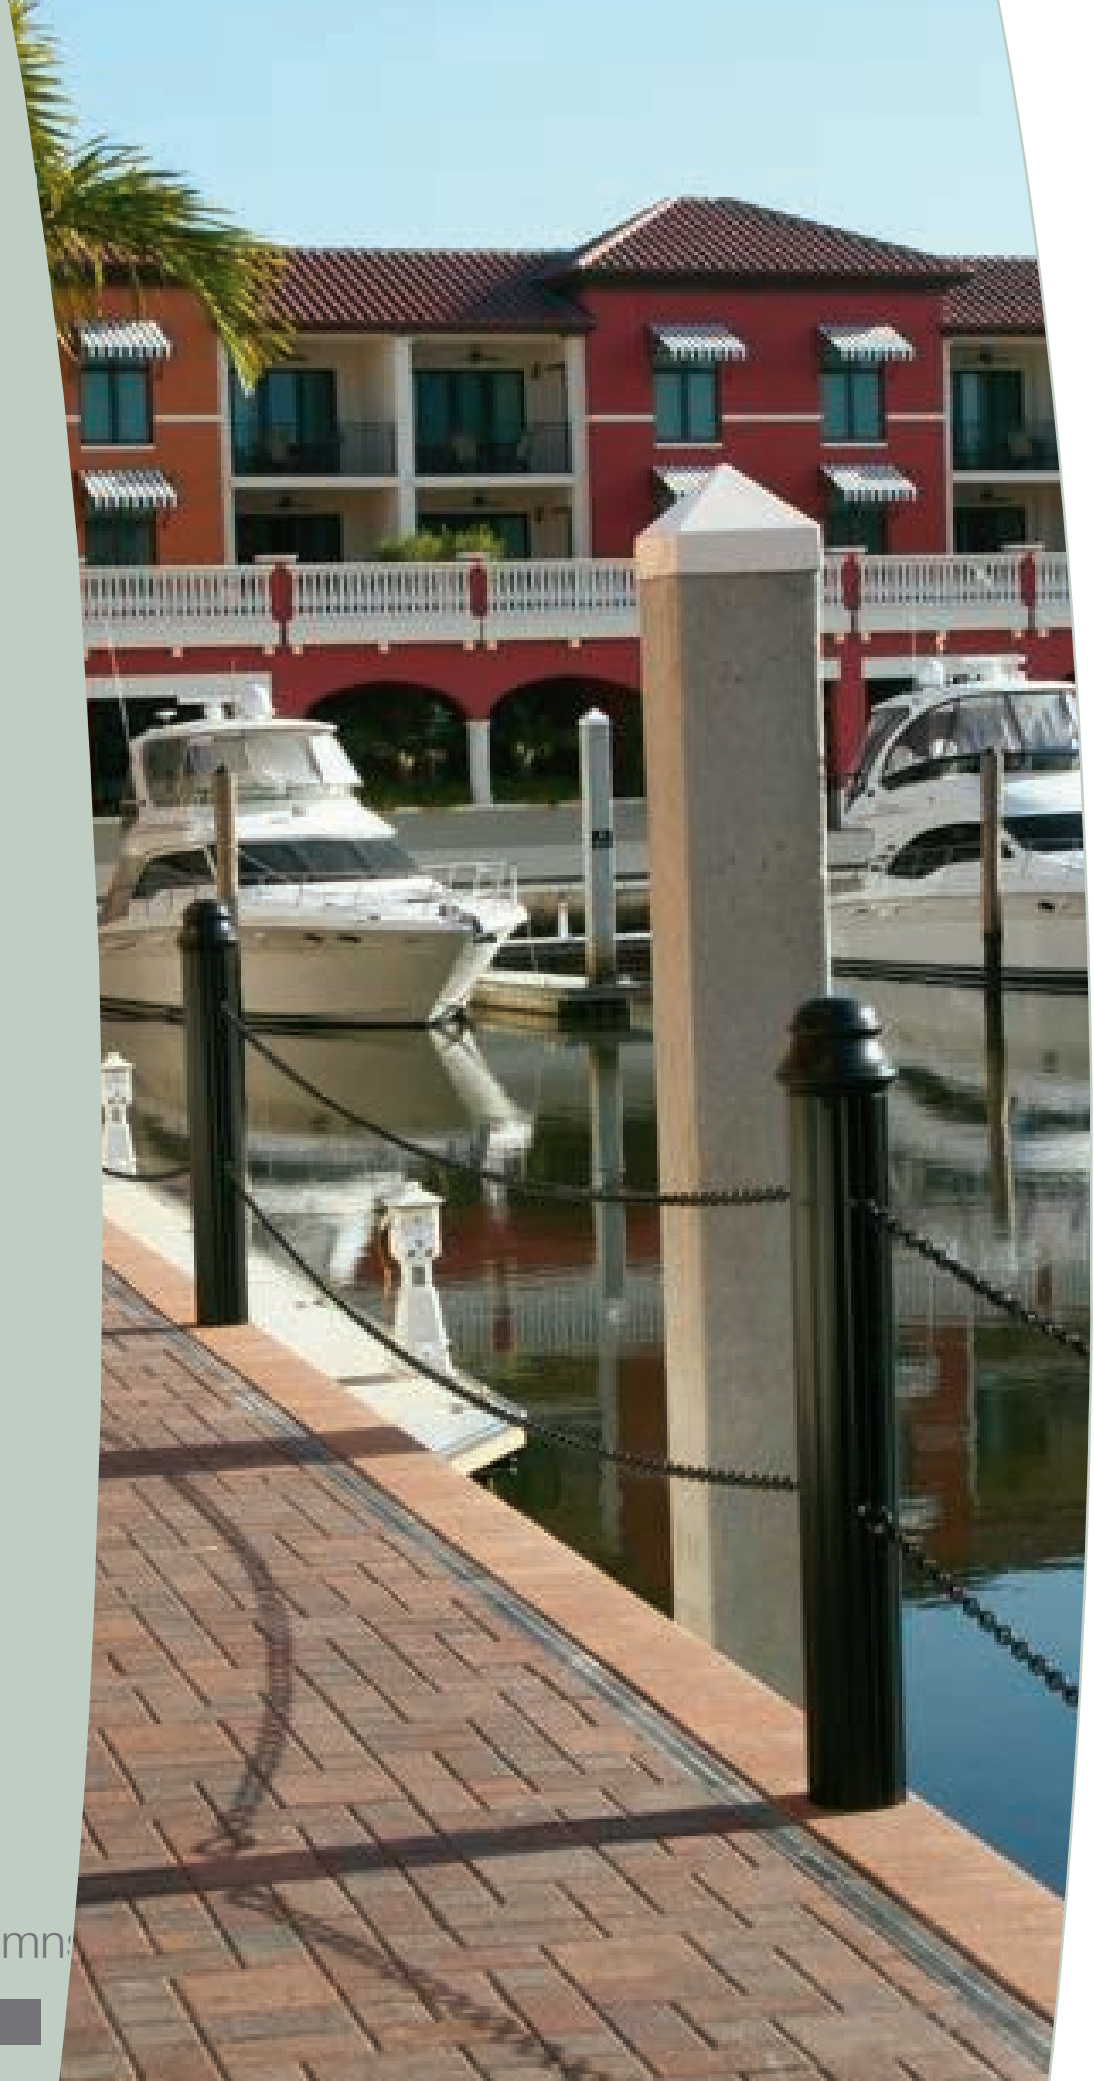

ordering logic

model

KEN42		Kensington

lens material

☐	A	acrylic
☐	P	polycarbonate

lens finish

☐	C	clear
☐	F	frosted
☐	W	white

source

☐	UL	unlighted
☐	PSMH	50 - 70W
☐	HPS	50 - 70W
☐	CF	13 - 42W

optics

☐	BL	bare lamp

electrical options

☐	FS	fusing
☐	PEC	photocell
☐	IQ	lamp/ballast diagnostics

style options

☐	CES	chain eye, single
☐	CED	chain eye, double

mounting options

☐	AB	anchor base
☐	DBE	direct burial extension

color (see page 33 for additional information)

☐	BB	black
☐	BZ	bronze
☐	BG	green
☐	BW	white
☐	BY	gray
☐	RAL	RAL _____
☐	OTHER	_____

footnotes:

1. Medium socket is standard for all HID sources.
2. CF sources utilize a 120-277 voltage-sensing electronic driver, HID sources utilize a Quad-Tap (120, 208, 240 & 277V) core & coil magnetic ballast.
3. Chain eye, unlit only.

ordering ex: KEN42 / AC / CF42-120 / BL / LSP / AB / BB