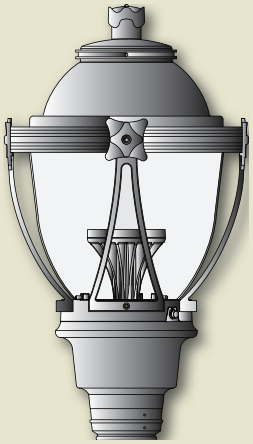

LON-T2-C2-H3

Width:	19.25"
Height:	34.5"
Weight:	45lbs
EPA:	2.16ft^2

London
ordering guide

ordering logic

model

LON-T2-C2-H3		London

lens material

☐	A	acrylic

lens finish

☐	C	clear (acrylic only)
☐	F	frosted
☐	R3	refractive type III
☐	R5	refractive type V

source

☐	LED	24, 48 & 70W
☐	QL	55, 85 & 165W QL induction
☐	PSMH	50 - 200W
☐	HPS	50 -150W
☐	CF	13 - 42W

optics

☐	IND3	indirect type III (LED)
☐	IND5	indirect type V (LED)
☐	DIR2	direct type II (LED)
☐	DIR3	direct type III (LED)
☐	DIR4	direct type IV (LED)
☐	DIR5	direct type V (LED)
☐	SR3	segmented reflector type III
☐	SR4	segmented reflector type IV
☐	SR5	segmented reflector type V
☐	GR3	glass refractor type III
☐	GR5	glass refractor type V

electrical options

☐	FS	fusing
☐	PEC	photocell
☐	QRS	quatrz restrike
☐	IQ	lamp/ballast diagnostics
☐	LSP	lightning surge protector

model (cont)

LON-T2-C2-H3		London

color (see page 33 for additional information)

☐	BB	black
☐	BZ	bronze
☐	BG	green
☐	BW	white
☐	BY	gray
☐	RAL	RAL _____
☐	OTHER	_____

footnotes:

1. Medium socket is standard for all HID sources under 250W.
2. IND and DIR optics require LED source, LED source requires IND or DIR optics. AC lens recommended.
3. FGCH & 3CD options are optionally energized when SR optics are selected (please consult factory for accommodation).
4. Factory suggests that BL option is selected only when a low wattage source is used in conjunction with non-clear or refractive lenses.
5. LED and CF sources utilize a 120-277 voltage-sensing electronic driver, HID sources utilize a Quad-Tap (120, 208, 240 & 277V) core & coil magnetic ballast, consult factory for 347 or 480V. 12VDC LED drivers are available for solar power assembly integration, consult factory.
6. QL induction source shall be supplied at 4000K (CCT), specify if 3000K is required. AR lens with BL option is recommended.
7. LED source shall be supplied at 4500K (CCT), specify is other color temp. is required (minimum quantities may apply).

ordering ex: LON-V2 / AC / LED48-120 / IND3 / LSP / BB