

Type:


Ordering Code:

Job Name:



Notes:

### DOMUS base

#### DOMU

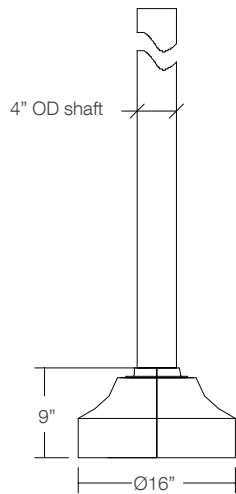

Shown with reducing collar for Ø4" shaft

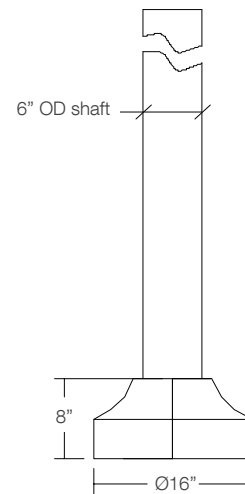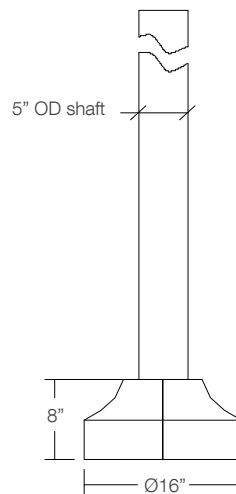

#### ordering

##### ORDERING EXAMPLE: DOMU / 4 / BB

<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------

model	diameter	color
<b>DOMU</b>	3 Ø3" OD	<b>BB</b> black
	4 Ø4" OD	<b>BZ</b> bronze
	5 Ø5" OD	<b>BW</b> white
	6 Ø6" OD	<b>BG</b> green
		<b>BY</b> gray
		<b>MB</b> metallic bronze
		<b>MT</b> metallic titanium
		___ RAL
		___ other

#### specification

**Construction:** Post shall be made from a one-piece, seamless extruded aluminum shaft welded to a cast aluminum monolithic base. A welded ground lug is accessible through the hand hole, which shall be located on the post shaft (opposite of the opening) and concealed by a formed aluminum cover. All cast aluminum parts shall be low copper alloy A356. All extruded aluminum parts shall be alloy 6061-T6. Cast aluminum bolt covers, which are mechanically attached to the based plate, are optional for this post and should be considered when a base cover will not be used. Standard fluted shaft profile shall be 16-flat flutes for 3"OD and 12-flat flutes for 4", 5", & 6"OD.

**Fasteners:** All fasteners shall be stainless steel. When tamper resistant fasteners are required, spanner HD (snake eye) style shall be provided (special tool required).

**Finish:** Finish shall be Beacote V polyester powdercoat paint, electrostatically applied and thermocured. All painted surfaces shall be subjected to chemical pre-treatment prior to painting by full immersion process. Finish shall meet or exceed AAMA 2604 standards.