


- 51" Victorian
- Bristol Park Post



VIC51 **VIC30**

Width:	18.5"	12"
Height:	51.5"	34"
Weight:	65lbs	40lbs
EPA:	2.46ft ²	1.43ft ²

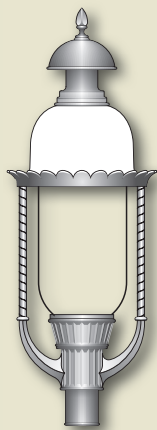

Victorian ordering guide

- 51" Victorian
- Holland Post



- 30" Victorian
- 8" Scroll Bracket



Luminaires

ordering logic

model		30" & 51" Victorian	
VIC30	VIC51		
lens material			
<input type="checkbox"/>	<input type="checkbox"/>	A	acrylic
<input type="checkbox"/>	<input type="checkbox"/>	P	polycarbonate
lens finish			
<input type="checkbox"/>	<input type="checkbox"/>	C	clear
<input type="checkbox"/>	<input type="checkbox"/>	F	frosted
<input type="checkbox"/>	<input type="checkbox"/>	S	seeded
<input type="checkbox"/>	<input type="checkbox"/>	W	white
source			
	<input type="checkbox"/>	LED	60 & 90W
	<input type="checkbox"/>	QL	55 & 85W Induction
<input type="checkbox"/>	<input type="checkbox"/>	PSMH	50 - 150W
<input type="checkbox"/>	<input type="checkbox"/>	HPS	50 - 150W
<input type="checkbox"/>	<input type="checkbox"/>	CF	13 - 42W
<input type="checkbox"/>	<input type="checkbox"/>	INC	150W
optics			
	<input type="checkbox"/>	IND3	indirect type III (LED)
	<input type="checkbox"/>	IND5	indirect type V (LED)
	<input type="checkbox"/>	DIR2	direct type II (LED)
	<input type="checkbox"/>	DIR3	direct type III (LED)
	<input type="checkbox"/>	DIR4	direct type IV (LED)
	<input type="checkbox"/>	DIR5	direct type V (LED)
	<input type="checkbox"/>	SR3	segmented reflector type III
	<input type="checkbox"/>	SR4	segmented reflector type IV
	<input type="checkbox"/>	SR5	segmented reflector type V
<input type="checkbox"/>	<input type="checkbox"/>	GR3	glass refractor type III
<input type="checkbox"/>	<input type="checkbox"/>	GR5	glass refractor type V
<input type="checkbox"/>	<input type="checkbox"/>	FGCH	frosted glass chimney (n/a w/LED)
<input type="checkbox"/>	<input type="checkbox"/>	3CD	triple candelabra (n/a w/LED)
<input type="checkbox"/>	<input type="checkbox"/>	BL	bare lamp
electrical options			
<input type="checkbox"/>	<input type="checkbox"/>	FS	fusing
<input type="checkbox"/>	<input type="checkbox"/>	PEC	photocell
<input type="checkbox"/>	<input type="checkbox"/>	QRS	quartz restrrike
<input type="checkbox"/>	<input type="checkbox"/>	IQ	lamp/ballast diagnostics
<input type="checkbox"/>	<input type="checkbox"/>	LSP	lightning surge protector

model (cont)		30" & 51" Victorian	
VIC30	VIC51		
mounting options			
<input type="checkbox"/>	<input type="checkbox"/>	PT	post top
style options			
<input type="checkbox"/>	<input type="checkbox"/>	STW	solid top (white paint)
<input type="checkbox"/>	<input type="checkbox"/>	STM	solid top (matching paint)
<input type="checkbox"/>	<input type="checkbox"/>	GT	glow top (white acrylic)
color (see page 33 for additional information)			
<input type="checkbox"/>	<input type="checkbox"/>	BB	black
<input type="checkbox"/>	<input type="checkbox"/>	BZ	bronze
<input type="checkbox"/>	<input type="checkbox"/>	BG	green
<input type="checkbox"/>	<input type="checkbox"/>	BW	white
<input type="checkbox"/>	<input type="checkbox"/>	BY	gray
<input type="checkbox"/>	<input type="checkbox"/>	RAL	RAL _____
<input type="checkbox"/>	<input type="checkbox"/>	OTHER	_____

footnotes:

1. IND and DIR optics require LED source, LED source requires IND or DIR optics.
2. FGCH & 3CD options are optionally energized when SR optics are selected (please consult factory for accommodation).
3. Factory suggests that BL option is selected only when a low wattage source is used in conjunction with non-clear lenses.
4. Medium socket is standard for all HID sources under 250W.
5. LED and CF sources utilize a 120-277 voltage-sensing electronic driver, HID sources utilize a Quad-Tap (120, 208, 240 & 277V) core & coil magnetic ballast, consult factory for 347 or 480V. 12VDC LED drivers are available for solar power assembly integration, consult factory.
6. QL induction source shall be supplied at 4000K (CCT), specify if 3000K is required.
7. LED source shall be supplied at 4500K (CCT), specify is other color temp. is required (minimum quantities may apply).